




■ Features:

- 170-240V AC input
- Single Output
- 90% high efficiency
- 100% full load bur-in test
- Protection: OTP, OLP, OVP, SCP
- CE FCC Certified
- 3 year warranty


Specifications

Product Code		N-200-12	N-200-24	N-200-48
Output	DC Voltage	12V	24V	48V
	Rated Current	16,6A	8,3A	4,15A
	Current Range	0~16,6A	0~8,3A	0~4,15A
	Voltage tolerance	±5%	±5%	±5%
	Rated Power	200W	200W	200W
	Ripple & Noise	<120mVp-p	<240mVp-p	<240mVp-p
	Start up time	<1500ms, 30ms / 230VAC		
Input	Input voltage range	170-240 VAC		
	Frequency Range	50~60Hz		
	AC Current	1,7A / 230VAC		
	Efficiency	88%	90%	90%
	No load consumption	<0.5W		
Protection	Over Load	Above 110%-150% of rated power		
		Shut-down output voltage, auto recovery after fault condition is removed		
	Over Voltage	Above Max. Voltage (105% of rated voltage)		
		Shut-down output voltage, auto recovery after fault condition is removed		
	Over Temperature	Over 105°C detected on thermal sensor		
		Shut-down output voltage, auto recovery after fault condition is removed		
Ambiant	Working Temp. & humidity	"-20°C~+60°C, 20%~90%RH		
	Storage temp. & humidity	"-40°C~+85°C, 10%~95%RH		
Tesings	Withstand voltage	I/P-O/P: 3KVAC/1min; I/P-F/G: 1.5KVAC/1min; O/P-F/G: 0.5KVAC/1min;		
	Safety	GB4943 ;EN62608-1		
	EMC	EN55032:2015/AC:2016 EN61000-3-3:2013 EN55024:2010+A1:2015		
Other	Lifespan	20000hrs		
	Demension(L*W*H)	175*50*25mm(L*W*H)		
	Packing	0.32kg/pcs, 50pcs/16kg/CTN		
Note	1, The above mentioned data were measured at 230VAC input and 25°C. 2, Dis-connect the AC input before checking any mal-phenomenons. 3, Make sure the INPUT&OUPUT were in right situation before connected to power supply. 4, Datesheet for reference only. We suggest you take sampling before mass orders.			


■ Block Diagram

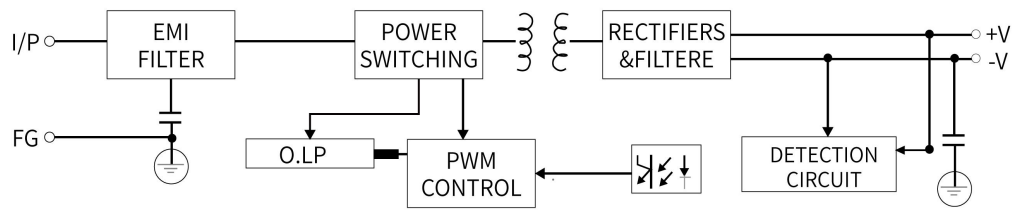


■ Mechanical Specification

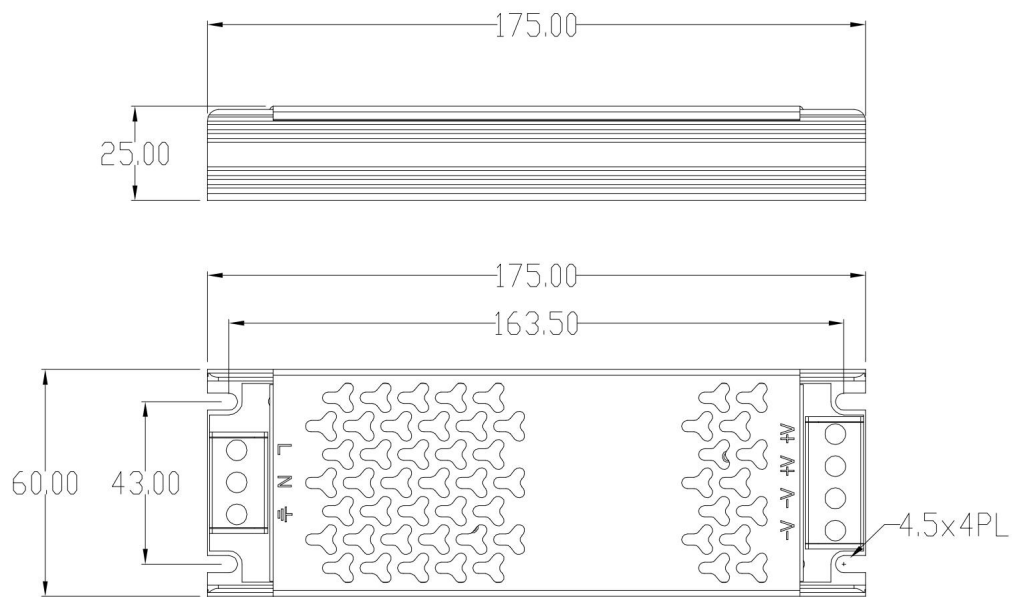

■ Wiring Diagram

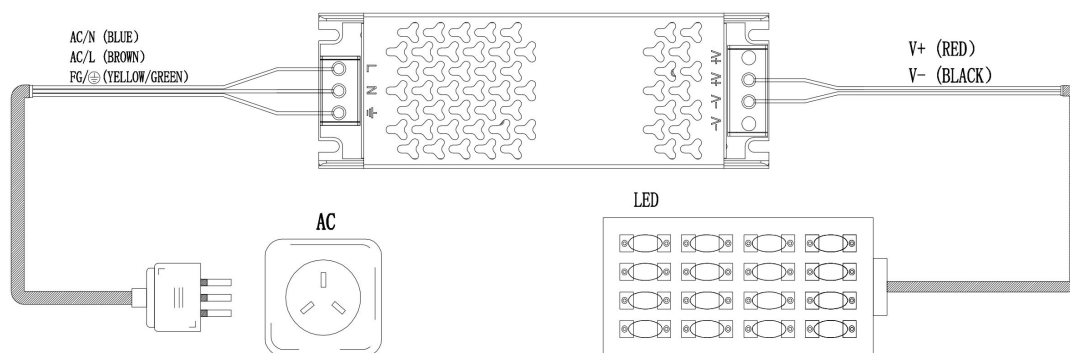

■ Temperature Derating Curve

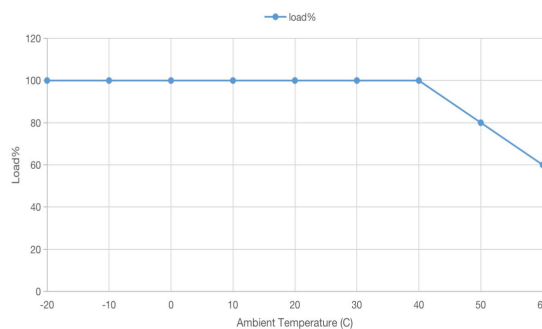

■ Output Load VS Input Voltage

